


BMS1-68 Grade A Form II/III

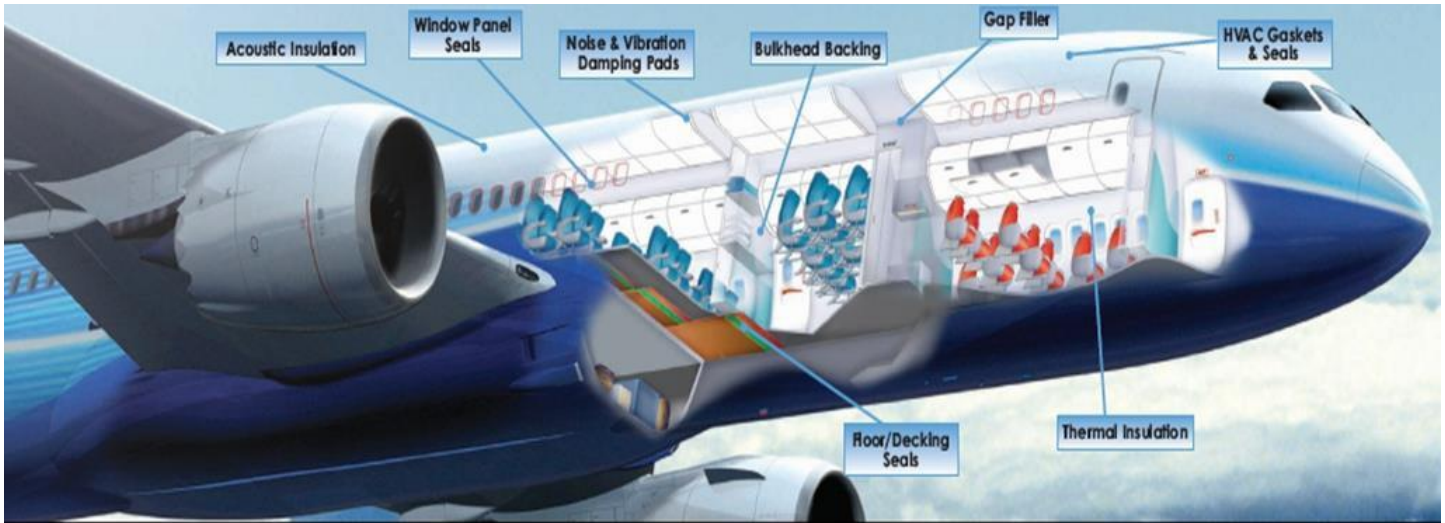

AeroWindTech Inc. is an authorized distributor and converter for Rogers Corporation Bisco Silicones division.

Purpose

BMS1-68 Grade A Form II/III is specified for the aerospace manufacturing/repair industries as a floor decking seal, thermal insulation, bulkhead backing and noise and vibration dampening pad and meets FAR 25.853 requirement as per manufacturers SRM & CMM manuals.

Composition

Low weight cellular silicone. Colors are white, gray or black.

Storage

BMS1-68 Grade A Form II/III should be stored in a dry cool environment. Shelf life is 18 months from date of shipment when stored at or below 70°F-80°F and a relative humidity of 45-55%.

Configurations

COLOR(S) WHITE GRAY BLACK	THICKNESS			* WIDTH*		LENGTH		TOTALS			
	inch		mm	inch	mm	feet	m	ft ²	m	lbs.	kg
	1/16	0.063	1.59	36	914	60	18.3	180	16.7	23	10
	3/32	0.094	2.38	36	914	60	18.3	180	16.7	29	13
	1/8	0.125	3.18	36	914	60	18.3	180	16.7	32	15
	3/16	0.188	4.76	36	914	40	12.2	120	11.1	30	14
	1/4	0.250	6.35	36	914	40	12.2	120	11.1	38	17
	3/8	0.375	9.53	36	914	20	6.1	60	5.6	27	12
	1/2	0.500	12.70	36	914	20	6.1	60	5.6	32	15
	5/8	0.625	15.88	36	914	20	6.1	60	5.6	40	18
	3/4	0.750	19.05	36	914	20	6.1	60	5.6	47	21
	1	1.000	25.40	36	914	10	3.0	30	2.8	32	14.5

Standard Roll width is 36". Different widths available up to 36".